


GB1 Glass Break Detector

Need help? Give us a call.
1-877-826-5443

Setup

STEP 1

Hold detector upside down and twist base counterclockwise to remove from back plate. Install batteries (CR123A). Wait 5 seconds for power-up delay.

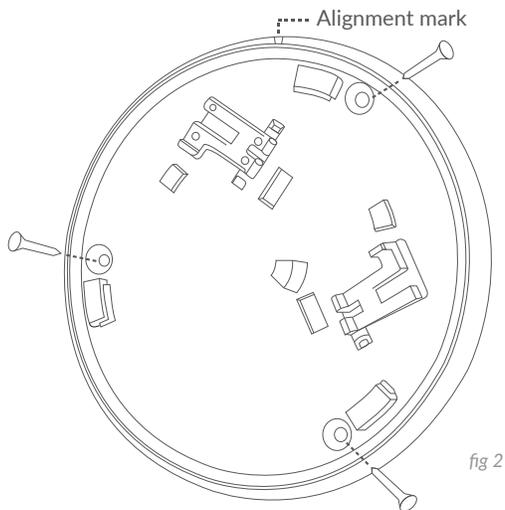


STEP 2

Place back plate on wall opposite or adjacent to window (fig 2). Affix back plate to desired location with supplied 3 long mounting screws and anchors.

Note: For wall mounting, orient test button down nearest the floor.

STEP 3

Attach detector to back plate (match alignment marks and twist clockwise).

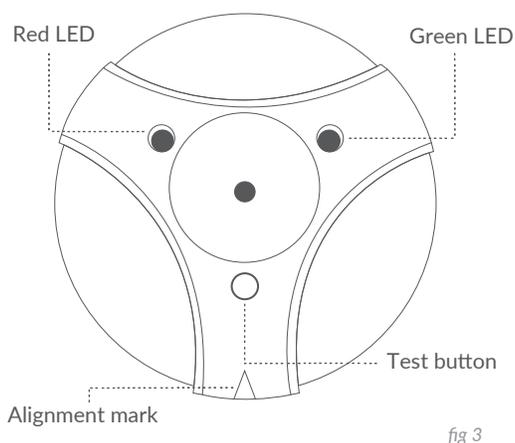

Test

STEP 1

Push test button for 2 seconds and then release. Green LED will blink once to indicate that unit is in auto test mode for 90 seconds (fig 3).

STEP 2

Simulate a glass-breaking sound in the protection area. Green LED will illuminate, followed by red LED.